

ACOUGLIME<sup>TM</sup>

Timber Flooring  
Adhesive



TERRA MATER



## Acouslime 3 in 1

- ✓ Isocyanate and solvent free – low VOC safer technology
- ✓ One-step installation process with built-in moisture vapour barrier to 85% RH\*
- ✓ Easy clean-up and removal of residue adhesive
- ✓ Excellent Ridge holding with slump-resistant, low viscosity, easy-to-trowel formulae
- ✓ Rapid grab and high-strength adhesive with elastomeric characteristics

### General Features and Benefits

- ✓ Suitable for solid timber, engineered timber and parquet flooring on most compliant substrates prepared per ATFA recommendations.
- ✓ SMP – Silane-modified Polymer adhesive, ready to use straight from the container.
- ✓ Very Low VOC - Contains no isocyanides or solvents – certified DIN EN 13556 compliant (European standard for Flooring Adhesives).
- ✓ Moisture barrier and adhesive in one when used with 4mm V notch trowel – up to 85RH.
- ✓ Ease of clean-up with damp cloth while wet or peel off when dried.
- ✓ Coverage approximately 14m<sup>2</sup> per 16kg drum using 4mm V notch trowel, dependant on substrate.
- ✓ Traffic after 12 hours – sand and seal if required after 72 hours.
- ✓ Available in 16kg drums.
- ✓ Achieves 70% elongation – test method DIN 53504<sup>1</sup>



Pack Size	Unit/Box	Unit/Pallet	Coverage
16kg Drum	-	44 Drums	12-13m <sup>2</sup>




## Acouslime 4 in 1

- ✓ Isocyanate and solvent free – low VOC and safer technology
- ✓ One-step installation process with built-in moisture vapour barrier (to 85% RH) and Acoustic barrier (up to 43dB)\*
- ✓ Easy clean-up and removal of residue adhesive
- ✓ Excellent Ridge holding with slump-resistant, low viscosity, easy-to-trowel formulae
- ✓ Rapid grab and high-strength adhesive with elastomeric characteristics

### General Features and Benefits

- ✓ Exclusive formulation that offers same benefits as Acouslime 3 in 1 PLUS additional benefits:
- ✓ Sound reduction, moisture vapour barrier and stable adhesive in one step.
- ✓ Achieves a 43dB sound reduction using 5mm V notch trowel for Acouslime 4 in 1 per VIPAC testing\*.
- ✓ Extremely low emission - EMICODE EC1 Plus and LEED compliant (Indoor Air Comfort Gold rating)
- ✓ Coverage approximately 10 m<sup>2</sup> per 16kg drum using 5mm V notch trowel.
- ✓ Traffic after 12 hours – sand and seal if required after 60 hours.
- ✓ Available in 16kg drums and 600 ml sausages.
- ✓ Achieves 85% elongation – test method DIN 53504<sup>1</sup>

## Acouslime 4 in 1 Sausage

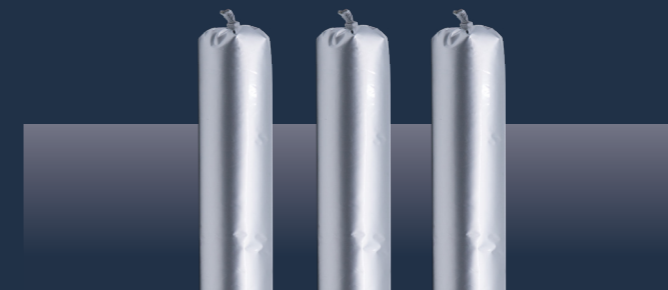

Pack Size	Unit/Box
600ml Sausage	20 per Box




Pack Size	Unit/Box	Unit/Pallet	Coverage
16kg Drum	-	44 Drums	9-10m <sup>2</sup>

\*Refer to Acouslime application guide for relative humidity slab moisture content evaluation and acoustic barrier performance (specific acoustic test reports available on request).

<sup>1</sup>To be employed where moisture in slab exceeds 85% Relative Humidity – please refer to Acouslime application guide for further details.

Please refer to website [www.terramaterfloors.com.au](http://www.terramaterfloors.com.au) for all technical data sheets and certificates.

## V Notch Trowel

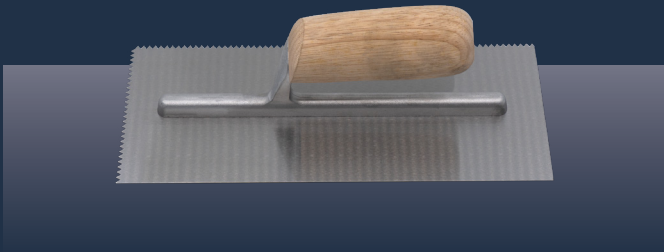

4mm V Notch Trowel	5mm V Notch Trowel
For Acouslime 3 in 1	For Acouslime 4 in 1

## Acouslime Moisture Seal<sup>1</sup>



Pack Size	Coverage
13Kg Container	100-110m <sup>2</sup>

<sup>1</sup>To be employed where moisture in slab exceeds 85% Relative Humidity – please refer to Acouslime application guide for further details.



**Terra Mater - Melbourne**  
 23-27 Rodeo Drive  
 Dandenong South VIC 3175  
 Australia  
 1300 671 777

[sales@terramaterfloors.com.au](mailto:sales@terramaterfloors.com.au)

**Terra Mater - Sydney**  
 1 Lennox Drive  
 Wetherill Park NSW 2164  
 Australia  
 1300 671 777

[sydneysales@terramaterfloors.com.au](mailto:sydneysales@terramaterfloors.com.au)

[www.terramaterfloors.com.au](http://www.terramaterfloors.com.au)