



Timber Flooring Adhesive



TERRA MATER



Acouslime 3 in 1

- ✔ Isocyanate and solvent free – low VOC safer technology
- ✔ One-step installation process with built-in moisture vapour barrier to 85% RH*
- ✔ Easy clean-up and removal of residue adhesive
- ✔ Excellent Ridge holding with slump-resistant, low viscosity, easy-to-trowel formulae
- ✔ Rapid grab and high-strength adhesive with elastomeric characteristics

General Features and Benefits

- ✔ Suitable for solid timber, engineered timber and parquet flooring on most compliant substrates prepared per ATFA recommendations.
- ✔ SMP – Silane-modified Polymer adhesive, ready to use straight from the container.
- ✔ Very Low VOC - Contains no isocyanides or solvents – certified DIN EN 13556 compliant (European standard for Flooring Adhesives).
- ✔ Moisture barrier and adhesive in one when used with 4mm V notch trowel – up to 85RH.
- ✔ Ease of clean-up with damp cloth while wet or peel off when dried.
- ✔ Coverage approximately 14m² per 16kg drum using 4mm V notch trowel, dependant on substrate.
- ✔ Traffic after 12 hours – sand and seal if required after 72 hours.
- ✔ Available in 16kg drums.
- ✔ Achieves 70% elongation – test method DIN 53504¹



Pack Size	Unit/Box	Unit/Pallet	Coverage
16kg Drum	-	44 Drums	12-13m ²



Acouslime 4 in 1

- ✔ Isocyanate and solvent free – low VOC and safer technology
- ✔ One-step installation process with built-in moisture vapour barrier (to 85% RH) and Acoustic barrier (up to 43dB)*
- ✔ Easy clean-up and removal of residue adhesive
- ✔ Excellent Ridge holding with slump-resistant, low viscosity, easy-to-trowel formulae
- ✔ Rapid grab and high-strength adhesive with elastomeric characteristics

General Features and Benefits

- ✔ Exclusive formulation that offers same benefits as Acouslime 3 in 1 PLUS additional benefits:
- ✔ Sound reduction, moisture vapour barrier and stable adhesive in one step.
- ✔ Achieves a 43dB sound reduction using 5mm V notch trowel for Acouslime 4 in 1 per VIPAC testing*.
- ✔ Extremely low emission - EMICODE EC1 Plus and LEED compliant (Indoor Air Comfort Gold rating)
- ✔ Coverage approximately 10 m² per 16kg drum using 5mm V notch trowel.
- ✔ Traffic after 12 hours – sand and seal if required after 60 hours.
- ✔ Available in 16kg drums and 600 ml sausages.
- ✔ Achieves 85% elongation – test method DIN 53504¹

Acouslime 4 in 1 Sausage



Pack Size	Unit/Box
600ml Sausage	20 per Box




Pack Size	Unit/Box	Unit/Pallet	Coverage
16kg Drum	-	44 Drums	9-10m ²

*Refer to Acouslime application guide for relative humidity slab moisture content evaluation and acoustic barrier performance (specific acoustic test reports available on request).

¹To be employed where moisture in slab exceeds 85% Relative Humidity – please refer to Acouslime application guide for further details.

Please refer to website www.terraterfloors.com.au for all technical data sheets and certificates.

V Notch Trowel

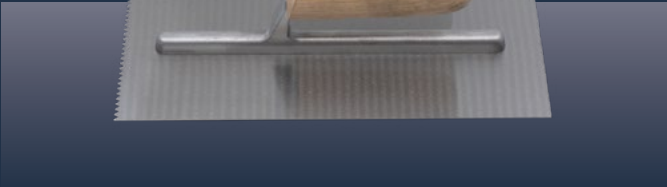

4mm V Notch Trowel	5mm V Notch Trowel
For Acouslime 3 in 1	For Acouslime 4 in 1

Acouslime Moisture Seal¹



Pack Size	Coverage
13Kg Container	100-110m ²

¹To be employed where moisture in slab exceeds 85% Relative Humidity – please refer to Acouslime application guide for further details.



Terra Mater - Melbourne
 15 Rangebank Drive
 Cranbourne West VIC 3977
 Australia
 1300 671 777

sales@terramaterfloors.com.au

Terra Mater - Sydney
 1 Lennox Place
 Wetherill Park NSW 2164
 Australia
 1300 671 777

sales@terramaterfloors.com.au

www.terramaterfloors.com.au